





Looped C[®] Air Spool.

yts-pump.com

YTS's Patented Looped C[®] Air Spool.

Mechanical Assisted Non Centering Spool Valve.
 New Modern Technology & Materials of Construction.
 High performance Looped C[®] Springs.
 Newly improved Spring Retainer.
 Ekonol[®] Seal Rings.
 Designed & Manufactured in Japan.
 Patented with Patents Pending.

D152VT
 1/2" PVDF Pump
 60 L/min Max Flow Rate

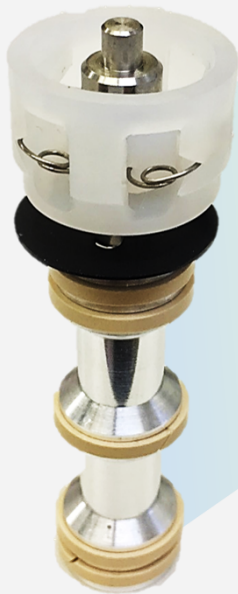

Features

- 100% Non-Lubricated.
- Increased Performance.
- Improved Reliability.
- Extended Life Expectancy.
- Resistant to Stalling & Freezing.
- Outside Accessible.
- Common "Drop-in" sizes.



- ❑ Air Powered Double Diaphragm Pumps Manufactured in Japan with Superior Quality & Finish.
- ❑ Designed for High Performance Operation & Long Life Expectancy.
- ❑ Engineered with Design Features Not Often Found in Other Brand Pumps.

AODD Pump Capabilities.

Self Priming.	Variable Discharge Pressures.	Inherently Safe Design.
Run Dry.	Transfer Liquid Slurries.	Portable & Easy to Use.
Run to Dead Head.	Transfer Large Sized Solids.	Transfer Viscous Fluids.
Variable Flow Rates.	Handle Abrasives.	Frequent Start Stop Operation.
Shear Sensitivity.	Transfer Chemicals.	Powered by Compressed Air.

For more information about YTS Pumps please contact: sales@yts-pump.com

©YTS Co Ltd Japan. All Rights Reserved 2020

